


NOTES:
 INTERFACE CONFORMS TO MIL-PRF-39012 SMA SERIES

MATERIALS:


BODY- BRASS PER ASTM-B-16
 CONTACT- BERYLLIUM COPPER PER ASTM-B-196
 INSULATOR- TEFLON PER ASTM-D-1710
 CRIMP SLEEVE-COPPER

FINISHES:

CONTACT & BODY- GOLD PLATE PER MIL-G-45204
 CRIMP SLEEVE

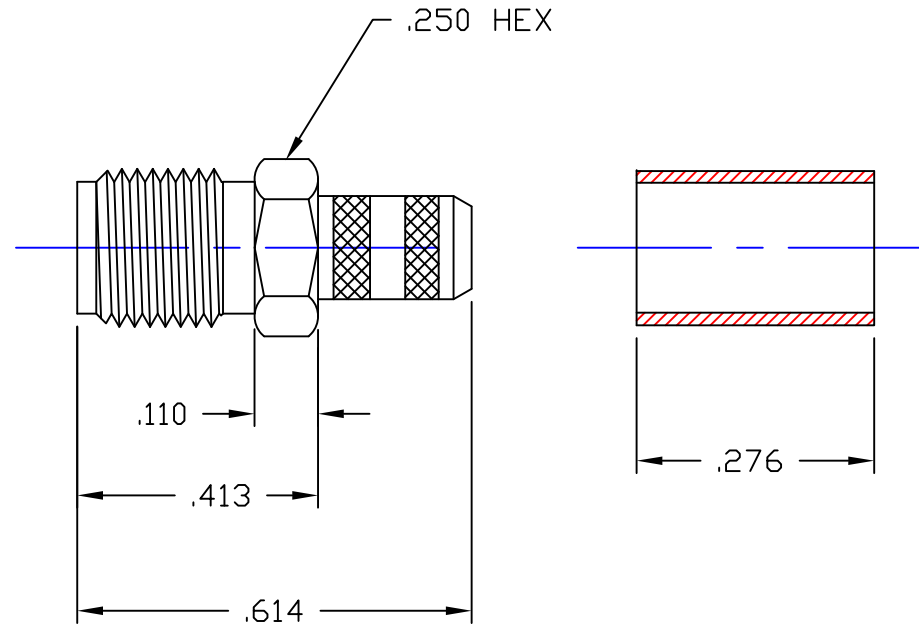

RECOMMENDED
 CABLE STRIPPING DIM'S

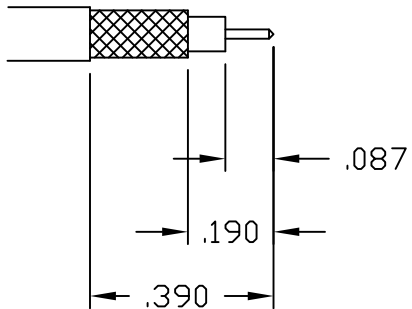

THIS DRAWING THE DESIGNS AND IDEAS EMBEDDED IN
 THE DEVICE TO WHICH IT RELATES AND THE METHOD
 OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED
 COPIED OR DISCLOSED TO ANYONE IN ANY MANNER
 WITHOUT THE CONSENT OF AN EZ FORM COMPANY
 OFFICIAL

APPD		
BY		
DATE		
DESCRIPTION		
REV.		

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES:
 TOLERANCES:

DECIMALS: FRACTIONS: ± 1/64
 2-PLACE ± .020
 3-PLACE ± .015 ANGLES: ± 3°

MATERIAL:		SCALE	
FINISH:			
DRAWN	DATE	CHECKED	DATE
P.J.P.	5-16-11	J.A.B.	5-16-11
APPROVED	DATE	SHEET	OF
A.T.	5-16-11	1	1

EZ FORM
CABLE CORPORATION
HAMDEN, CT 06517

TITLE			
SMA JACK FOR RG 316 FLEX CABLE			
A	CODE IDENT.		REV.
	9W826	CD-705561-001	—