
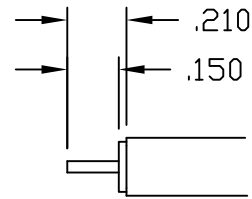


NOTES:
 INTERFACE CONFORMS TO MIL-PRF-39012 TNC SERIES

MATERIALS:
 CONTACT,CAP, _____ BRASS PER ASTM-B-16
 BODY, _____
 COUPLING NUT _____
 SNAP RING _____ BERYLLIUM COPPER PER ASTM-B-196
 GASKET _____ SILICONE PER ZZ-R-765
 INSULATOR _____ TEFLON PER ASTM-D-1710

FINISHES:
 CONTACT,BODY,CAP - GOLD PLATE PER MIL-G-45204
 COUPLING NUT - NICKEL PLATE PER QQ-N-290

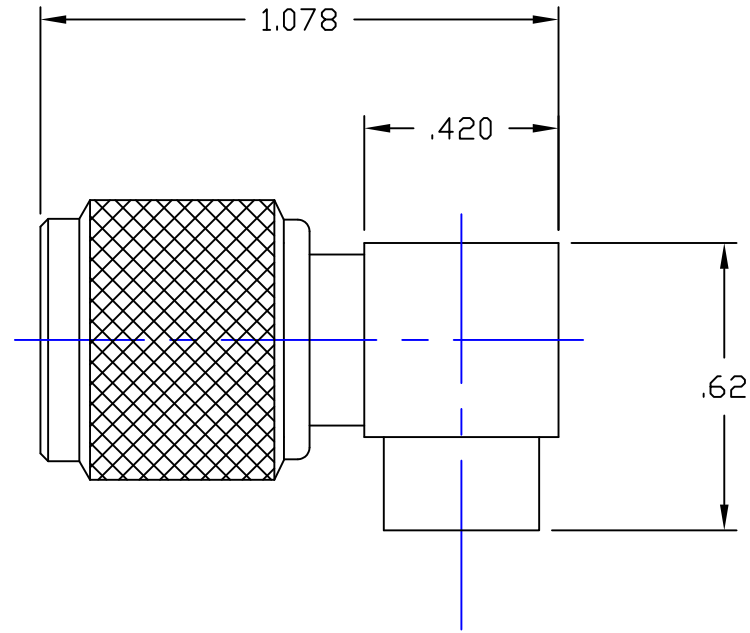

RECOMMENDED
 CABLE STRIPPING DIM'S

ORDER AS 701045-250TNC

THIS DRAWING THE DESIGNS AND IDEAS EMBEDDED IN
 THE DEVICE TO WHICH IT RELATES AND THE METHOD
 OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED
 COPIED OR DISCLOSED TO ANYONE IN ANY MANNER
 WITHOUT THE CONSENT OF AN EZ FORM COMPANY
 OFFICIAL

APPD		
BY		
DATE		
DESCRIPTION		
REV.		

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES:			SCALE
TOLERANCES:			
DECIMALS:	FRACTIONS ± 1/64		
2-PLACE ± .010	ANGLES ± 3°		
3-PLACE ± .005			
MATERIAL: _____			
FINISH: _____			
DRAWN	DATE	CHECKED	DATE
P.J.P.	4-28-04	J.A.B.	4-28-04
APPROVED	DATE	SHEET	OF
A.T.	4-28-04	1	1

EZ FORM			
CABLE CORPORATION			
HAMDEN, CT 06517			
TITLE			
TNC RIGHT ANGLE MALE PLUG FOR .250 SEMI RIGID CABLE			
A	CODE IDENT.		REV.
	9W826	CD-701045-250	—