
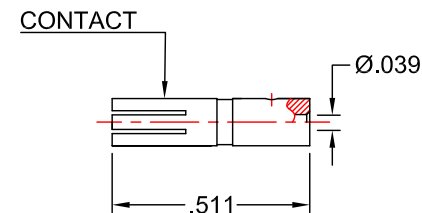


RoHS
COMPLIANT

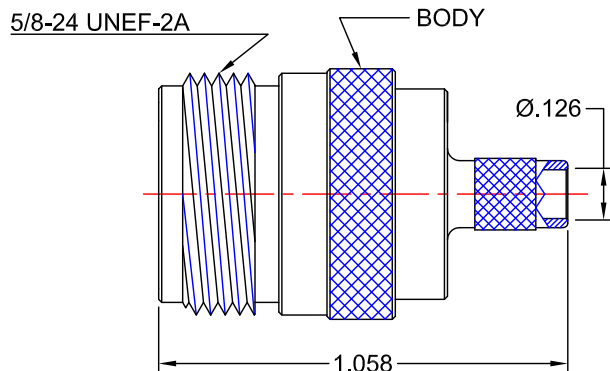

NOTES:

INTERFACE CONFORMS TO MIL-PRF-39012
AND MIL-STD-348 "N" SERIES

ELECTRICAL:


NOMINAL IMPEDANCE: 50Ω
FREQUENCY RANGE: DC TO 11 GHz

MATERIALS:


INSULATOR: TEFLON PER ASTM-D-1710
BODY, & CONTACT: 360 ALLOY BRASS 1/2 HARD PER ASTM-B-16
CRIMP SLEEVE: 360 ALLOY BRASS PER ASTM-B-16

FINISHES:

CONTACT: GOLD PLATE PER MIL-DTL-45204
BODY: NICKEL PLATE PER QQ-N-290

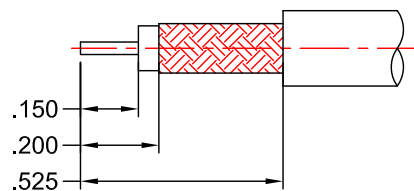

RECOMMENDED STRIPPING DIMENSIONS

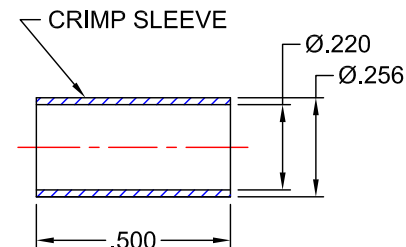

PROPRIETARY NOTICE
THIS DRAWING AND DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD. DATE	T.D. DATE	
BY DATE	J.N. DATE	
DESCRIPTION	INITIAL RELEASE	
REV.	-	

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES:		SCALE 2:1	
TOLERANCES: NONE			
MATERIAL SEE NOTES			
FINISH SEE NOTES			
DRAWN	DATE	CHECKED	DATE
J.N.	4/13/17	T.D.	4/13/17
APPROVED	DATE	SHEET 1 OF 1	
A.T.	4/13/17		

	EZ Form Cable Corporation 285 Welton Street Hamden, CT 06517 WWW.ezform.com	
	TYPE "N" STRAIGHT JACK FOR RG-58/U CABLE	
A	CODE IDENT. 9W826	701250N
		REV. -