

INTERFACE CONFORMS TO MIL-PRF-39012 SMA SERIES



NOTES:

MATERIALS:

- BODY, COUPLING NUT ————— STAINLESS STL. TYPE 303 PER ASTM-A-582
- SNAP RING ————— BERYLLIUM COPPER PER ASTM-B-196
- GASKET ————— SILICONE PER ZZ-R-765
- INSULATOR ————— TEFLON VIRGIN WHITE PER ASTM-D-1710

FINISHES:

- BODY, CONTACT ————— GOLD PLATE PER MIL-G-45204
- COUPLING NUT ————— PASSIVATE PER QQ-P-35

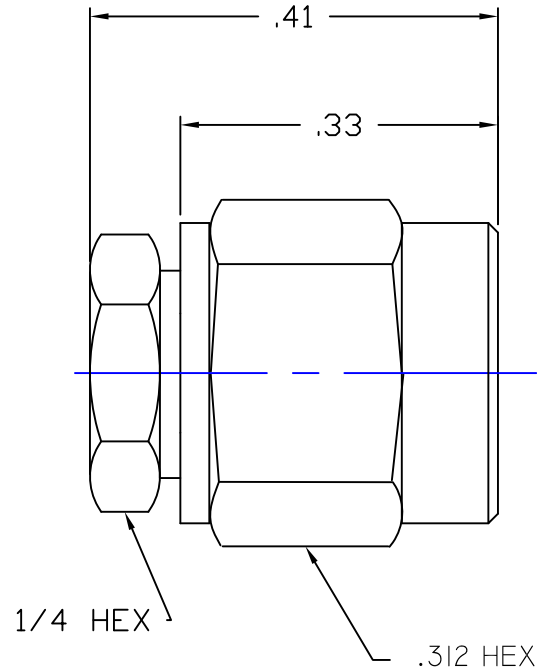

THIS DRAWING THE DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD	A.T.
BY	P.J.P.
DATE	2-6-06
DESCRIPTION	.010 SHIM WAS .015 SHIM
REV.	A

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES:		SCALE	
TOLERANCES:			
DECIMALS:	FRACTIONS ± 1/64		
2-PLACE ± .015	ANGLES ± 3		
3-PLACE ± .005			
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
DRAWN	DATE	CHECKED	DATE
P.J.P.	2-6-06	A.T.	2-6-06
APPROVED	DATE	SHEET	OF
J.A.B.	2-6-06		

EZ FORM			
CABLE CORPORATION			
HAMDEN, CT 06517			
TITLE SMA MALE PLUG ANTI TORQUE THICK WALL DESIGN FOR USE WITH .086 SEMI RIGID CABLE			
A	CODE IDENT.		REV.
	9W826	CD-705522-303	A