



**RoHS
COMPLIANT**

NOTES:
INTERFACE AND ENVIRONMENTAL REQUIREMENTS
CONFORM TO MIL-PRF-39012 AND MIL-STD-348 TYPE N SERIES

MATERIALS:
INSULATOR: TEFLON PER ASTM-D-1710
GASKET: SILICONE RUBBER PER ZZ-R-765
CONTACT: BRASS PER ASTM-B-16
RETAINING RING: PHOSPHOR BRONZE PER ASTM-B-544
ALL OTHER METAL PARTS: BRASS PER ASTM-B-16

FINISHES:
CONTACT : GOLD PLATE PER MIL-G-45204
SOLDER BODY: GOLD PLATE PER MIL-G-45204
COUPLING NUT: NICKEL PLATE PER QQ-N-290

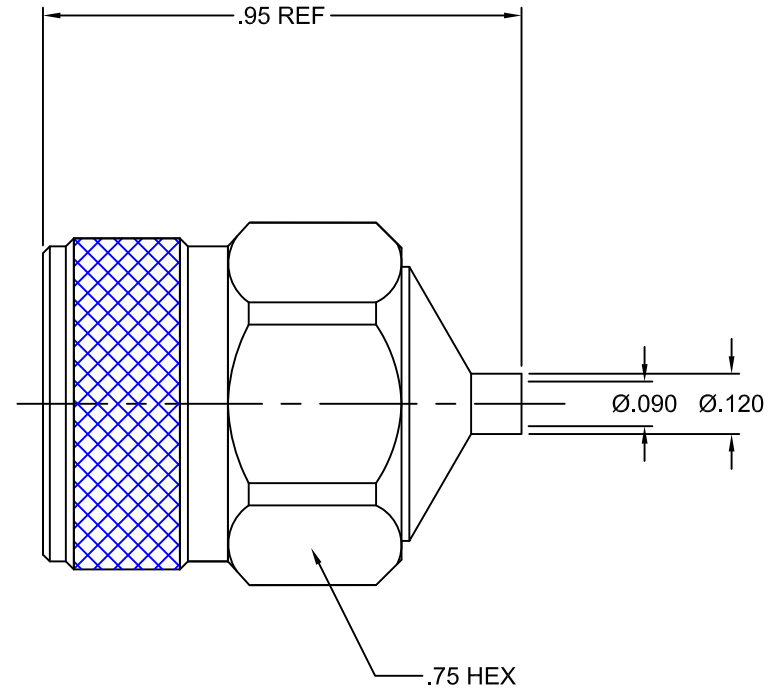

CABLE STRIPPING DIMENSIONS

PROPRIETARY NOTICE
THIS DRAWING AND DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD.	EW	
DATE	7/24/13	
BY	EW	
DATE	7/24/13	
DESCRIPTION	INITIAL RELEASE	
REV.	-	

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES:		SCALE	
TOLERANCES:		1:1	
DECIMALS:	FRACTIONS: ± 1/64		
2-PLACE ± .05	ANGLES: ± 3°		
3-PLACE ± .030		CUSTOMER:	
CUST. P/N & REV.:			
DRAWN	DATE	CHECKED	DATE
EW	7/24/13	AT	7/24/13
APPROVED	DATE	SHEET 1 OF 1	
JAB	7/24/13		

	EZ Form Cable Corporation 285 Welton Street Hamden, CT 06517	
	TITLE TYPE "N" MALE STRAIGHT PLUG FOR .086 SEMI-RIGID CABLE	
CODE IDENT. A 9W826	705931-103	REV. -